


DS-2CC102/112/192P(N)-IR3 Color IR Camera



- Compact design
- 1/3" Sony CCD
- Minimum Illumination: 0.1Lux/F1.2 (0 Lux with IR)
- Auto white balance, auto gain control, electronic shutter control and backlight compensation
- Internal synchronization
- Weather Proof: IP66 standard

Unit: mm

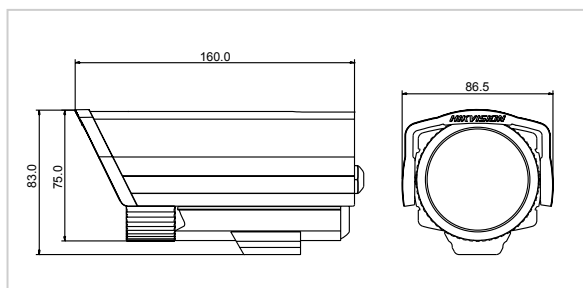

Specifications

		DS-2CC102P(N)-IR3	DS-2CC112P(N)-IR3	DS-2CC192P(N)-IR3
Camera	Image Sensor	1/3 " SONY Super HAD CCD		
	Effective Pixels	PAL: 500(H)×582(V) NTSC: 510(H)×492(V)	PAL: 752(H)×582(V) NTSC: 768(H)×494 (V)	PAL: 752(H)×582 (V) NTSC: 768(H)×494(V)
	Horizontal Resolution	420TVL	480TVL	540TVL
	Signal System	PAL/NTSC		
	Min. Illumination	0.1Lux @ F1.2 (0 LUX with IR)		
	Electronic Shutter	1/50 (1/60)s~1/100,000s		
	Synchronization	Internal Synchronization		
	Video Output	1Vp-p Composite Output (75Ω/BNC)		
Lens	S/N Ratio	More than 48 dB		
	BLC	ON		
General	Lens	12mm (3.6mm, 6mm, 8mm, 16mm optional)		
	IR Range	Approx 30 to 40 meters (100-130ft)		
	Weather Proof	IP66		
	Power Supply	12VDC, ±10%		
	Power Consumption	6W MAX		
	Working Temperature	-10°C~60°C(14°F~140°F)		
	Dimension	86.5×83×160mm (3.41"×3.27"×6.30")		
Weight	1000g (2.20lbs)			

Available Models

DS-2CC102P-IR3, DS-2CC102N-IR3, DS-2CC112P-IR3, DS-2CC112N-IR3, DS-2CC192P-IR3, DS-2CC192N-IR3